



62-021 Sarbinowo
ul. Długa 12
tel. +48 61 897 36 03/04/32
e-mail: biuro@norson.pl
norson@norson.pl

DECLARATION OF PERFORMANCE No. 08/25


1. The name and trade name of the construction product:
NZ, NZE, NE, NKP, NKE connections and NOBW and NOBZ PN10/16 cast iron connection clamps.
2. Type designation of a construction product:
Spotting drill type NZ PN10/16 for PE and PVC pipes, catalog number 1-122...
Spotting drill with a steel band, type NZE PN10/16, for cast iron, asbestos-cement, steel pipes, for catalog 1-123...
NE flanged clamp, catalog number 1-125...
NKP tubular flange attachment, catalog number 1-127...
NKE tubular flange attachment, catalog number 1-126...
NOBW and NOBZ PN 10/16 cast iron connection clamps for PE and PVC pipes, catalog number 1-124...
3. Intended use or uses of a construction product:
used for connecting household installations to a water supply network made of PVC / PE pipes (NZ, NKP, connection clamps), cast iron / steel / AC (NZE , NE, NKE bases).
The instalation should be made using a drilling device.
4. Name and address of the manufacturer's premises and place of production of the product:
Norson Sp. z o.o. Sp. K.
Sarbinowo, ul. Długa 12
62-021 Paczkowo
5. Where appropriate, the name and contact address of the authorized representative whose mandate covers the tasks specified in art. 12 p. 2:
not applicable.
6. System or systems for assessment and verification of constancy of performance of a construction product as defined in the Annex to the Regulation:
system 4.
7. National technical specification:
7a. Polish Product standard: **PN-EN 1074-1:2002**
The name of the accredited certification body, accreditation number and national certificate number or the name of the accredited laboratory:
not applicable.
- 7b. National technical evaluation: -
not applicable

8. Declared performance.

Essential characteristics	Useful properties	Technical Specifications
- maximum working pressure	1.6 MPa	PN-EN 1074-1:2002 PN-EN 1074-2:2002
- external / internal protective coating	polyester paint with a thickness of min. 250µm	manufacturer's specification
- working temperature	from 0°C - 70°C	
- steel band diameter range (NE, NZE)	according to the catalogue card	
- steel band (NE, NZE)	stainless steel	PN-EN 10088-1:2014-12

9. The performance of the product specified above is in accordance with all declared performance in point 8. This national declaration of performance is issued in accordance with the Act of 16 April 2004 on construction products, under the sole responsibility of the manufacturer.

On behalf of the manufacturer

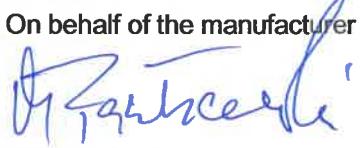

Sarbinowo, November 5, 2025
(place and date of issue)

DoP 08/25