


Duckfoot bend N PN 10 and ductile iron PN 10/16

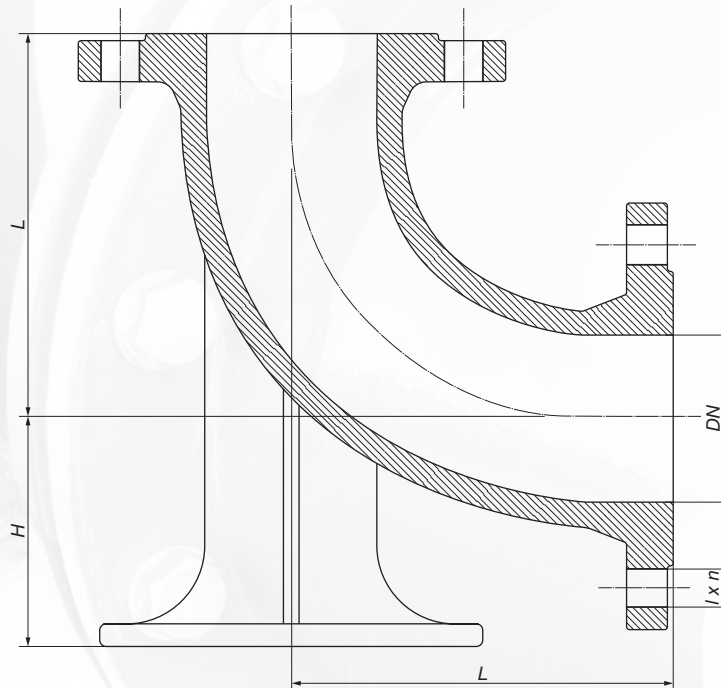

It is used to build water supply systems and extend the pipeline to the surface (installation of hydrants).

Coating: bitumen paint, epoxy paint 250-360 μm
Material: cast iron EN-GJL-250, PN-EN 1561:2000
Flange connection: PN-EN 1092-2:1999
Nominal pressure: 1,0 MPa; PN 10

| DN | L | H | l | n | Weight |
|-------|-----|-----|----|------|--------|
| 80/65 | 165 | 110 | 18 | 8/4 | 12,00 |
| 80 | 165 | 110 | 18 | 4(8) | 15,40 |
| 100 | 180 | 125 | 18 | 8 | 20,50 |
| 150 | 220 | 160 | 22 | 8 | 42,00 |
| 200 | 260 | 190 | 22 | 8 | 54,00 |

Coating: epoxy paint 250-360 μm
Material: ductile iron, EN-GJS-500-7, PN-EN 1563:2000
Flange connection: PN-EN 1092-2:1999
Nominal pressure: 1,0/1,6 MPa; PN 10/16

| DN | L | H | l | n | Weight |
|-----|-----|-----|----|-------|--------|
| 80 | 165 | 110 | 18 | 8 | 15,00 |
| 100 | 180 | 125 | 18 | 8 | 19,50 |
| 150 | 220 | 160 | 22 | 8 | 35,00 |
| 200 | 260 | 190 | 22 | 8(12) | 51,00 |