


## Overground hydrant DN 100 PN 10 and ductile iron PN 10/16

No.	Description	Pcs.	Material
1.	Blank cover	1	Polyethylene
2.	Ring	1	EN-GJL-250/EN-GJS-500-7
3.	Chamber	1	EN-GJL-250/EN-GJS-500-7
4.	Piston	1	EN-GJS-500-7/EPDM/NBR
5.	Gasket	3	EPDM/NBR
6.	Pipe	1	Steel PN-EN 10088-3:2015 Steel PN-EN 10224:2003
7.	Rivet	2	Steel St 2/Steel C1006
8.	Pipe	1	Steel PN-EN 10088-3:2015 Steel PN-EN 10224:2003 Ductile iron PN-EN 1563:2012
9.	Nut's casing	1	EN-GJS-500-7
10.	Head	1	EN-GJL-250/EN-GJS-500-7
11.	Nut	1	Brass MO59
12.	Cap	2	Aluminium AK11
13.	Cover gasket	2	EPDM/NBR
14.	Cover	2	EN-GJL-250/EN-GJS-500-7/ AK11/Polyethylene
15.	Cord	1	Steel
16.	Bearing	2	Tarnamid
17.	O-ring	3	EPDM/NBR
18.	O-ring	1	EPDM/NBR
19.	Choke	1	Brass MO59
20.	Spindle	1	Stainless steel 2H13
21.	Allen screw	1	Galvanized steel 8.8 class/ Stainless steel A2
22.	Knob	1	EN-GJL-250/EN-GJS-500-7
23.	Cap gasket	2	EPDM/NBR
24.	Cap DN 100	1	Aluminium AK11
25.	Cap cover DN 100	1	EN-GJL-250/EN-GJS-500-7/ AK11/Polyethylene
26.	Reducer	1	EN-GJS-500-7

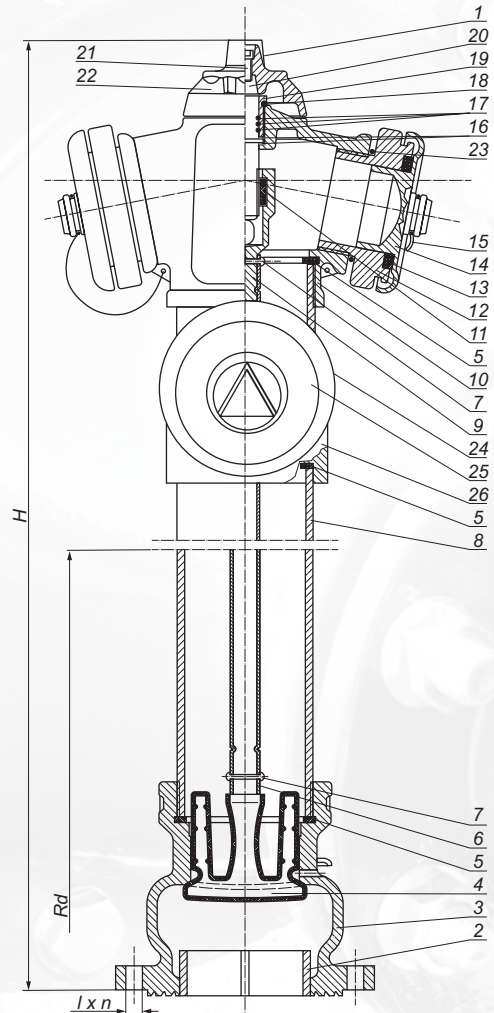

Overground hydrant DN 100 with an automatic drainage in the lower chamber, designed for drawing water from a general purpose pipeline of nominal diameter 100 mm, water with a temperature of up to 40°C and a pressure of 1,0 or 1,6 MPa.

Certificate of conformity CNBOP 1438/CPR/0521

Coating: epoxy paint UV resisted, 250-360 µm

Flange connection: PN-EN 1092-2:1999

Nominal pressure: 1,0/1,6 MPa, PN 10/16

DN	Size	H	Rd	l	n	Weight
100	A	1900	1250	18	8	39,00
	B	2150	1500	18	8	42,00
	C	2450	1800	18	8	44,00
	X	as per order				